

Lift'EvO motorized



Only available
on
Orion EvO
1 x 800

Suitable for Orion EvO 1x800 deck ovens

Performances

The lifter can be integrated to the whole range of Bongard deck ovens, 1, 2, or 3 doors wide.

The advantages

- Saves workspace around the oven
- Compact
- Easy to use
- Easy to store

Use

The integrated lifter is used to load and unload baking chambers.

Operating principle

Two columns located on either side of the oven frame support the integrated lifter. An ergonomic handle is used to raise or lower the lift. Once the loader is positioned in front of the oven door, the loader is activated for loading and unloading.

- Elevator is stored in front of the oven, at hood level. Attention : make sure there is enough clearance under ceiling.
- Ergonomic handles : for lifting and loading
- Handles can be assembled, on site, either on the right or on the left
- Height under lifter on highest position : 1880 mm
- Reduced size of lifter columns : 2x10 cm wide
- Tilting hook system on lifter as standard supply



Construction

- Waterproof bearings, no maintenance for the sliding motion of the loader - unloader
- Translation parts in stainless steel and plastic materials
- Lifting system with chains and counterweight

• • • Important note:

When hooks for loader-unloader are fitted on lifter, the oven must be ordered without hooks

Motorized Integrated lifter Lift'EvO - Orion EvO 1x800

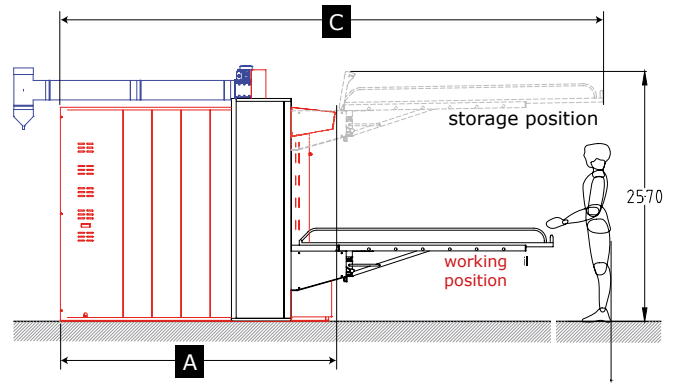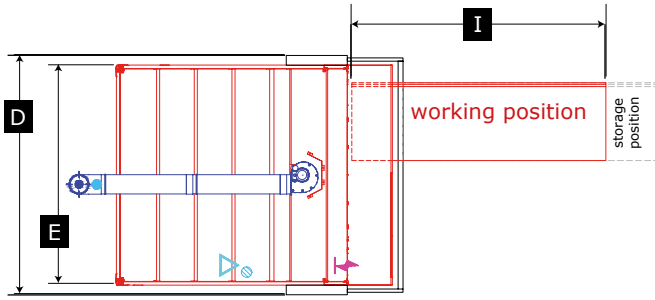

● ● ● **Important notes :**
 Total height in storage position > 1880 mm
 Narrow fixing columns : 2 x 10 cm width.

	A	I	E	D	
Depth	Overall depth	Length (lifter)	Width (oven)	Width (oven+lifter)	Overall width (+mini. Technical access)
(mm)					
Mobile hooks on lifter					
120	2226	1886	1441	1645	2245
160	2640	2256	1441	1645	2245
180	2852	2626	1441	1645	2245
200	3046	2626	1441	1645	2245
220	3256	3015	1441	1645	2245
240	3451	3015	1441	1645	2245
Fixed hooks on lifter					
120	2226	2256	1441	1645	2245
160	2640	2626	1441	1645	2245
180	2852	3015	1441	1645	2245
200	3046	3015	1441	1645	2245
220	3256	ND	1441	1645	2245
240	3451	ND	1441	1645	2245
Fixed hooks on oven					
120	2226	1886	1441	1645	2245
160	2640	2256	1441	1645	2245
180	2852	2256	1441	1645	2245
200	3046	2626	1441	1645	2245
220	3256	3015	1441	1645	2245
240	3451	3015	1441	1645	2245